


LOADER SPECIFICATION

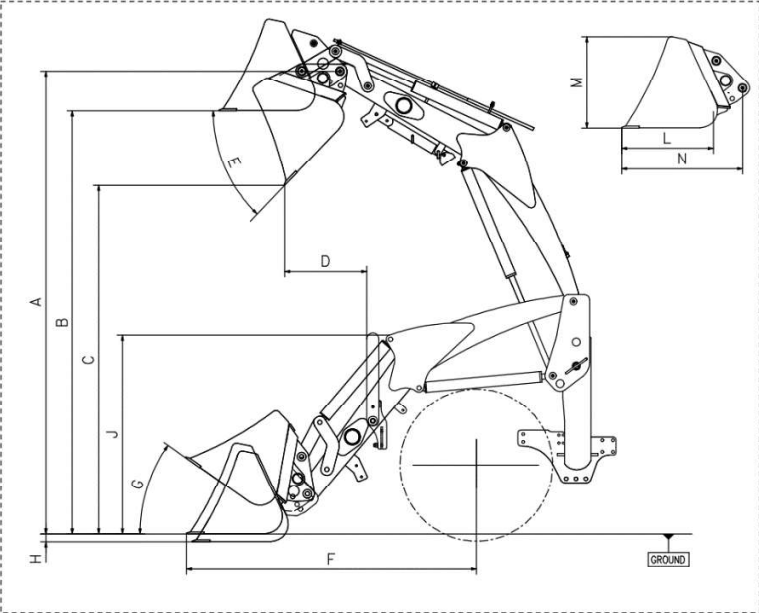

	Loader Total Weight (1+2+3)	457 kg	1,008 lb
1	Weight of Boom & Quick Atta.	225 kg	496 lb
2	Weight of Mounting Frame	122 kg	268 lb
3	Weight of Bucket	110 kg	242 lb
Boom raising time		4.4 sec	
Boom lowering time		3.1 sec	
Bucket rollback time		2.6 sec	
Bucket dumping time		3.7 sec	

A	Maximum lift height to pivot pin	2,665 mm	104.9 "
B	Maximum lift height under lever bucket	2,445 mm	96.3 "
C	Clearance with bucket dumped	1,955 mm	77.0 "
D	Reach at maximum lift height	405 mm	15.9 "
E	Maximum dump angle	55 °	55 °
F	Reach with bucket on ground	1,847 mm	72.7 "
G	Maximum rollback angle	35 °	35 °
H	Digging depth	119 mm	4.7 "
J	Overall height in carry position	1,295 mm	51.0 "
L	Depth of Attachment (to back of inner shell)	530 mm	20.9 "
M	Height of Attachment	530 mm	20.9 "
N	Length of Attachment (to pivot pin)	712 mm	28.0 "
	Lift capacity to maximum height at pivot pin	998 kgf	2,200 lb
	Breakout force at ground level, pivot pin	1,552 kgf	3,421 lb
	Bucket rollback force at ground line	1,160 kgf	2,557 lb
	Relief valve setting (Loader control valve)	172 kg/cm ²	2,446 psi
	Rated Flow (Tractor System)	32.9 L/min	8.7 gpm
	Lift Cylinder	55X30 mm	2.2X1.2 "
	Bucket Cylinder	50X30 mm	2.0X1.2 "
	Bucket Width	1,570 mm	62 "
	Bucket Capacity	0.23 m ³	8.1 ft ³