D7 14K TELESCOPIC I-BEAM DUMP


STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

INSIDE BED WIDTH: 83"	DECK HEIGHT: 28"	CARGO CAPACITY: 6-11.3YD³	Dump Angle: 45°
LENGTH: 12', 14'	COUPLERS: Bumper Pull & Pintle	AXLES: Tandem (2 x 7,000 lbs.)	
GVWR: 14,000 lbs.	LOAD CAPACITY: 10,140 - 10,850 lbs.	DUMP SIDES HEIGHT: 18" SIDE WALL + 6" BOARDS (OPTIONAL 36" SIDE WALL + 8" BOARDS)	

AVAILABLE WITH HIGH SIDES (36" SIDE WALL + 8" BOARDS)



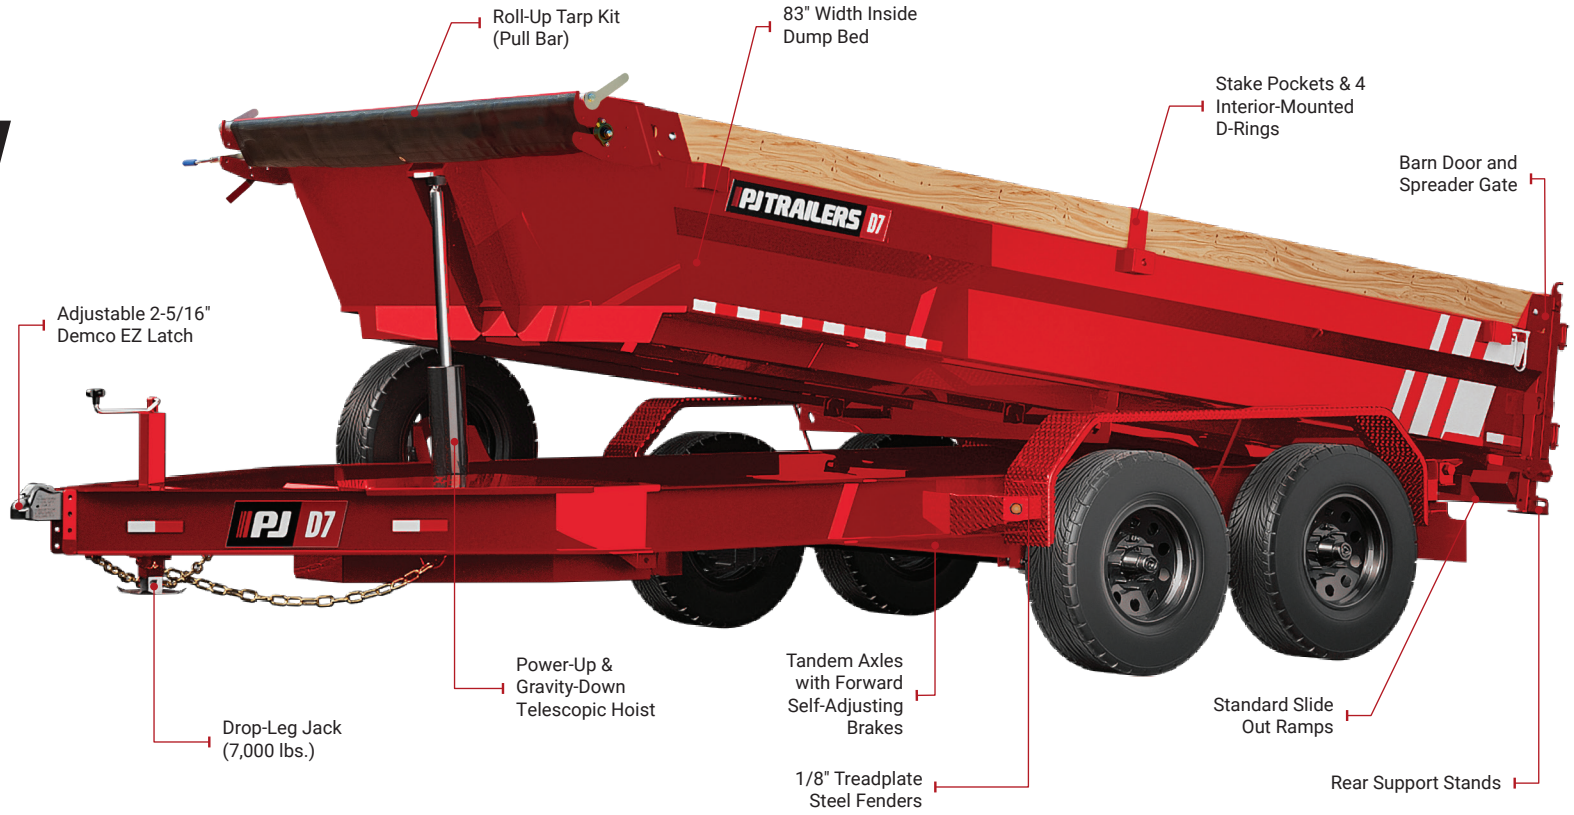



The cylinder positioned in the front stays clear during operation and is easily accessible for maintenance.

5-STAGE TELESCOPIC HOIST



This structural design reduces flex and increases stability when hauling equipment or aggregate.

8" I-BEAM FRAME



Easy-to-install lumber and board brackets protect the sidewall of the dump when loading material.

INTEGRATED SIDEBOARD BRACKETS



Enables quick, secure gate closure with spring loaded latching.

SLAM LATCH GATE

PJ TRAILERS

VISIT PJTRAILERS.COM FOR A COMPLETE LIST OF TRAILER OPTIONS.

PJ Trailers reserves the right to change price, design, material and/or specification without notice or obligation.