# Knoxville TN

Phone: +18653991276
7880 Asheville Highway
Knoxville, Tennessee
Email: jason@iwtrailers.com

---

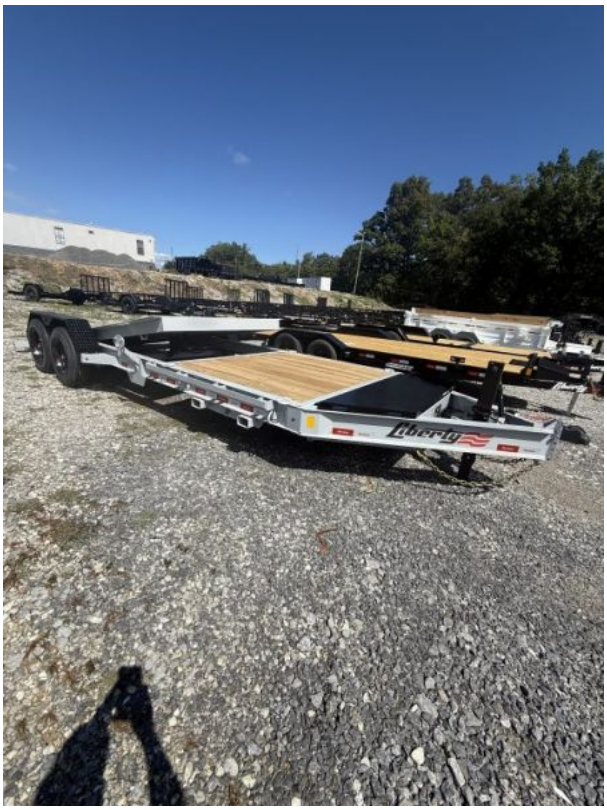


## 2027 Liberty LT16K 22’ Tilt Trailer, 17.5K GVWR, OIL BATH AXLES, FORK HOLDERS, TOOLBOX

| | | | |
|---|---|---|---|
| **Type** | Trailer or Truck Bed | **Category** | Tilt Trailer |
| **Stock#** | LIBERTYLT16KNX | **Location** | Knoxville TN |
| **Year** | 2027 | **Status** | Available |
| **Condition** | New | **Manufacturer** | Liberty |
| **Model** | LT | **Floor Length** | 264in / 22ft |
| **Floor Width** | 82in / 6ft 10in | **GVWR** | 17500 |
| **Weight** | 4520 | **Payload Capacity** | 12980 |
| **Axle Capacity** | 8000 | | |
| **Pull Type** | Bumper | **Axles** | 2 |
| **Construction** | Steel | | |

https://iwtrailers.com/unit/2027-liberty-lt16k-22-tilt-trailer-17-5k-gvwr-oil-bath-axles-fork-holders-toolbox-1268951

**Price: $11,795.00**

---

**Description**

- **2026 LIBERTY TILT TRAILER 22’**
- 8K DEXTER OIL BATH HUBS
- 12,000 LB SPRING-LOADED DROP-LEG JACK
- DEMCO EZ LATCH® ADJ. COUPLER (2-5/16”)
- RADIAL TIRES (16-PLY)
- BLACK MOD STEEL WHEEL
- 8” I-BEAM FRAME & TONGUE
- REMOVABLE DIAMOND PLATE STEEL FENDERS
- TREATED PINE FLOOR
- ZIP™ COILED BREAKAWAY CABLE
- OVERSIZED TONGUE STORAGE BOX W/ LOCKABLE LID
- RUBRAIL & STAKEPOCKETS ALONG SIDES
- (8) D-RINGS
- 16’ TILT PLATFORM W/ HYDRAULIC DAMPENING SYSTEM
- STEEL CYLINDER RESERVOIR
- TILT SPEED CONTROL VALVE
- DIAMOND PLATE REAR KNIFE EDGE FOR EASY LOADING
- SKID STEER FORK STORAGE POCKETS
- (5) LEAF SLIPPER-SPRING SUSPENSION
- INDUSTRIAL-GRADE SEALED WIRING HARNESS
- LODESTONE™ MAGNETIC 7-WAY PLUG
- L.E.D. LIGHTING PACKAGE
- MODULAR SPARE TIRE MOUNT (SPARE SOLD SEPERATELY)
- SAND BLASTED, DEGREASED, ACID WASHED, SEALER RINSED
- SHERWIN-WILLIAMS POWDURA® PROTECTIVE FINISH
- MULTIPLE FINISH COLORS AVAILABLE

---